


**Euca Super FBB / GC1**  
**丽盈超高松白卡纸**  
**JXPM2 & ZJPM4**

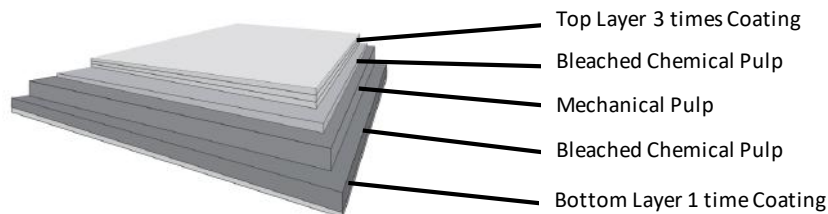

**TECHNICAL SPECIFICATIONS (BLUE WHITE)**

Items	项目	Unit	Standard/ Method	JXPM2			ZJPM4		
Basis Weight	定量	gsm	ISO 536	185±3%	205±3%	220±3%	255±3%	305±3%	345±3%
Caliper	厚度	PT	ISO 534	11.0	12.2	13.6	16.3	19.3	21.9
Caliper	厚度	μm	ISO 534	280±10	310±10	345±10	415±10	490±10	555±10
ISO Brightness	亮度	%	ISO 2470-1	91±1/91±1	91±1/91±1	91±1/91±1	91±1/91±1	91±1/91±1	91±1/91±1
Stiffness Taber MD	纵向挺度	mNm	ISO 2493	4.5	6.5	8	12.2	21	27
Stiffness Taber CD	横向挺度	mNm	ISO 2493	2.6	3.2	4.2	7	9.5	14
Gloss 75°	光泽度	%	ISO 8254	≥45	≥45	≥45	≥40	≥40	≥40
Ink absorption	油墨吸收率	%	K&N	20±3	20±3	20±3	20±3	20±3	20±3
Internal Bond Strength	层间结合力	J/m <sup>2</sup>	TAPPI 833 pm-94	≥130	≥130	≥130	≥120	≥120	≥120
Moisture	水分	%		8.0±0.5	8.0±0.5	8.0±0.5	8.5±0.5	8.5±0.5	8.5±0.5
Surface Printing Intensity	表面印刷强度	m/s	ISO 3783	2.0	2.0	2.0	2.0	2.0	2.0
Bulk	松厚度	cm <sup>3</sup> /g	ISO 534	1.51	1.51	1.57	1.63	1.61	1.61

Test conditions: ISO Temperature: 23±10C Humidity: 50±2%RH

FSC is available